



HIT SERIES

30~250 Ton



- Feature**
- Injection Molding Machine : 30~250Ton
 - Motion Guide : High Strength and Low noise LM
 - Vertical Arm Structure : Non Telescopic Arm
 - Traverse Structure : Digital Servo Motor
 - Vertical Structure : Pneumatic Actuator
 - Crosswise Structure : Pneumatic Actuator

Power : 1Phase AC220V(50/60Hz)
Driving Method : Digital Servo Motor
Control Method : Micro Computer
Air Pressure : 6 kgf/cm²
Max. Air Pressure : 8 kgf/cm²
Chuck Rotation : 90°

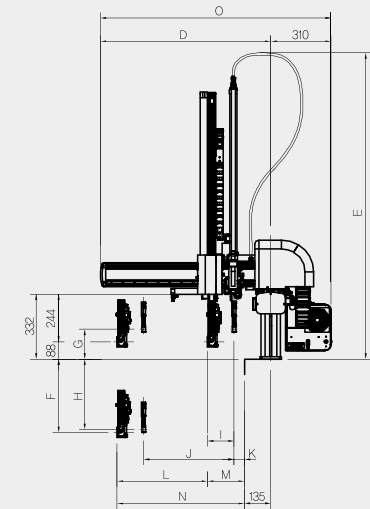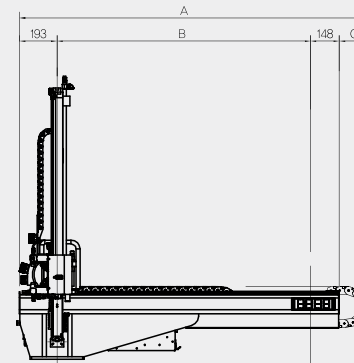

Technical Specification

() is optional.

Model	Traverse (mm)		Vertical (mm)		Crosswise (mm)		Max. Electric Consumption	Air Consumption [L (normal)/Cycle]	Max. Payload (Chuck Included)	I.M.M (Ton)
	Standard		Main Arm	Sub Arm	Main Arm	Sub Arm				
HIT - 100S	1100		700	-	150	-	1Phase / AC 220V 1.4A (Max.)	22	3 Kgf	30~80
HIT - 100D			700	750	150	90		30		
HIT - 200S	1300		800 (900)	-	150	-		25		100~250
HIT - 200D			800 (900)	850 (950)	150	90		35		

All information subject to change without notice for quality improvements.

Dimension

Unit : mm

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
HIT-100S	1583	1100	142	788	1270	612	-	-	-	-	-	380	189	569	1098
HIT-100D					1470							153	597		
HIT-200S	1783	1300	142	873	1370	712	-	-	-	-	-	465	189	654	1183
HIT-200D					1570							153	697		

All information subject to change without notice for quality improvements.